



Unit 1B, 7 Olympia Street,
Eastgate, Sandton, Gauteng, RSA, 2063
Tel: +27 11 656 2533
sales@vortex-za.com
admin@vortex-za.com
www.vortex-za.com

DEAR

Plumbers
www.blutide.co.za

blutide
Taps inspired by life

VORTEX SANITARY WARE

Installation Instructions

GUARANTEE:

BluTide Taps and Mixers carry a 15 year guarantee against manufacturing defects. All finishes, other than chrome, carry a 5 year guarantee. Faults caused by normal wear and tear as well as misuse or incorrect installation are excluded. This product is supplied exclusively by Vortex Sanitaryware (Pty) Ltd.

In the unlikely event that you experience issues with this product during installation, please contact our technical support on **+27 11 656 2533** or mail us at service@vortex-za.com

Alternatively, for any after sales support please contact Vortex call centre on **+27 11 656 2533**

www.vortex-za.com

PRODUCT MAINTENANCE, CARE AND CLEANING:


- Only use a soft cloth with a mild soap and warm water to clean the product.
- Aerators should be checked and cleaned regularly.

IMPORTANT: Do not use abrasives cleaning materials or detergents.

INSTALLATION REQUIREMENT:

- This products must be installed by a qualified/accredited plumber.
- For products dimensional drawings, please visit www.blutide.co.za
- Ensure the water system is flushed and cleaned before installation.
- All connections to the product must be 'fit for purpose' and comply with local standards.
- The product requires a minimum working pressure of 200Kpa, not exceeding 600Kpa.
- Pressure must be balanced between hot and cold supply.
- Ensure water temperature does not exceed 75°C.

Concealed & Concealed + Diverter Mixers

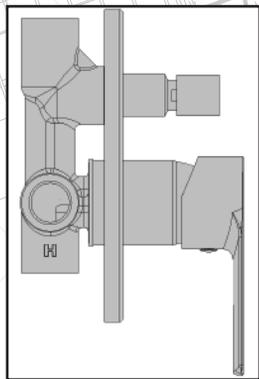


TIP

Ensure proper measurements on installation depth are taken before piping and installation.

TIP


All basin and sink mixers are designed to fit a deck hole size of Ø30 - Ø35mm.

Flexible hoses should be clear of chemicals and installed without excessive bending, stretching or twisting.

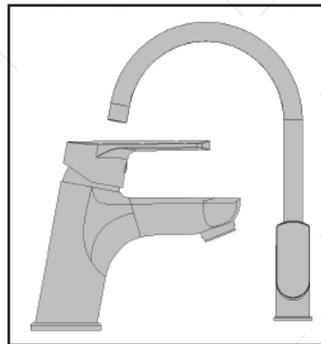

Basin & Sink Mixers

Wall Type Bath & Sink Mixers

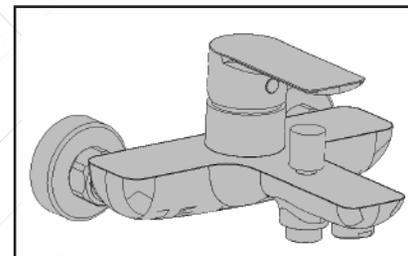

TIP

Wall Type Mixers are installed onto a ½" BSP female connector.

It is important that wall outlet connections are plumbed 130-170mm apart (centres are 150mm). The S-Connections should be parallel to each other as well as true to the wall.

DISCLAIMER

All products shown in BluTide's catalogues and on any of BluTide's digital platforms, are the products available in the range at the time of publication. In the interest of product development and improvement, we reserve the right to exchange or substitute items when necessary or are unable to supply. The dimensions of products shown in BluTides

catalogues and on any digital platforms are for reference only. In case there is a discrepancy between the dimensions published and that of the actual product, the latter shall be taken as standard. BluTide is committed to provide complete and up-to-date information but will not assume any liability for damages arising directly or indirectly from the use of our catalogues or website.

The use of trademarks, product design and artwork is subject to license or agreement with BluTide's directors and design department. The design registrations and copyrights are protected by law and the use or reproduction outside the terms of an agreement is prohibited.

Errors and omissions excepted (E&OE)